ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ СЕРТИФИКАТ ◆ CERTIFICADO ◆ CERTIFICAT


Product Service

C E R T I F I C A T E

No. Z2 099333 0044 Rev. 26

Holder of Certificate: **LONGi Green Energy Technology Co., Ltd.**
No. 388, Middle Hangtian Road
Chang'an District
710100 Xi'an City, Shaanxi
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

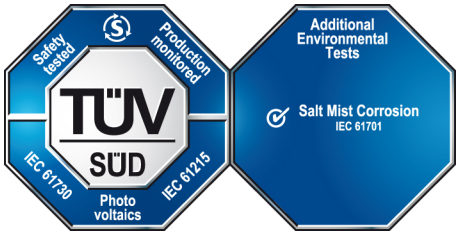

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**

Mono-crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the Testing, Certification, Validation and Verification Regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061802021-26

Valid until: 2029-07-03

Date, 2025-07-01

(Zhulin Zhang)

TÜV SÜD Product Service GmbH • Certification Body • Ridlerstraße 65 • 80339 Munich • Germany

TÜV®

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ СЕРТИФИКАТ ◆ CERTIFICADO ◆ CERTIFICAT

Product Service

C E R T I F I C A T E

No. Z2 099333 0044 Rev. 26

Model(s):

LR5-72HBD-xxxM (xxx=500-565, in step of 5)
LR5-72HBD-xxxMa (xxx=500-565, in step of 5)
LR5-72HBD-xxxMc (xxx=500-565, in step of 5)
LR5-72HBD-xxxMc1 (xxx=530-565, in step of 5)
LR5-72HBD-xxxMc2 (xxx=530-565, in step of 5)
LR5-72HBD-HD-xxxM (xxx=500-565, in step of 5)
LR5-72HIBD-xxxM (xxx=500-565, in step of 5)
LR5-66HBD-xxxM (xxx=475-515, in step of 5)
LR5-66HIBD-xxxM (xxx=475-515, in step of 5)
LR5-60HBD-xxxM (xxx=435-470, in step of 5)
LR5-60HIBD-xxxM (xxx=435-470, in step of 5)
LR5-54HBD-xxxM (xxx=390-425, in step of 5)
LR5-54HIBD-xxxM (xxx=390-425, in step of 5)
LR5-54HABD-xxxM (xxx=395-420, in step of 5)
LR5-78HBD-xxxM (xxx=570-605, in step of 5)
LR5-54HABB-xxxM (xxx=395-415, in step of 5)
LR5-54HIBB-xxxM (xxx=395-415, in step of 5)
LR5-72HGD-xxxM (xxx=540-595, in step of 5)
LR5-72HGD-xxxMc (xxx=560-595, in step of 5)
LR7-72HGD-xxxM (xxx=565-635, in step of 5)
LR5-72HJD-xxxM (xxx=575-595, in step of 5)
LR5-72HTDR-xxxM (xxx=550-600, in step of 5)
LR5-72HTD-xxxM (xxx=550-600, in step of 5)
LR5-54HTD-xxxM (xxx=415-450, in step of 5)
LR8-66HGD-xxxM (xxx=595-630, in step of 5)
LR8-48HGD-xxxM (xxx=430-455, in step of 5)
LR7-72HTDR-xxxM (xxx=585-655, in step of 5)
LR7-66HTDR-xxxM (xxx=535-575, in step of 5)
LR7-60HTDR-xxxM (xxx=485-525, in step of 5)
LR7-54HTDR-xxxM (xxx=435-475, in step of 5)
LR7-72HYD-xxxM (xxx=625-660, in step of 5)
LR7-72HVD-xxxM (xxx=625-660, in step of 5)
LR7-48HGDT-xxxM (xxx=385-415, in step of 5)
LR7-54HGBB-xxxM (xxx=440-460, in step of 5)
LR8-66HYD-xxxM (xxx=625-670, in step of 5)
LR7-54HVD-xxxM (xxx=475-495, in step of 5)
LR5-78HGD-xxxM (xxx=610-645, in step of 5)
LR7-72HJD-xxxM (xxx=650-680, in step of 5)
LR7-66HJD-xxxM (xxx=595-625, in step of 5)
LR7-60HJD-xxxM (xxx=540-570, in step of 5)
LR7-54HJD-xxxM (xxx=485-515, in step of 5)
LR7-48HJD-xxxM (xxx=430-460, in step of 5)
LR7-36HJD-xxxM (xxx=320-350, in step of 5)
LR7-32HJD-xxxM (xxx=280-310, in step of 5)
LR8-66HVD-xxxM (xxx=625-670, in step of 5)
LR7-60HVD-xxxM (xxx=520-550, in step of 5)
LR8-54HGBB-xxxM (xxx=490-510, in step of 5)
LR7-72HVBB-xxxM (xxx=625-655, in step of 5)
LR7-54HVBB-xxxM (xxx=460-495, in step of 5)
LR7-72HVDF-xxxM (xxx=625-660, in step of 5)
LR7-72HJBB-xxxM (xxx=650-680, in step of 5)
LR7-66HJBB-xxxM (xxx=595-620, in step of 5)
LR7-60HJBB-xxxM (xxx=535-565, in step of 5)
LR7-54HJBB-xxxM (xxx=480-510, in step of 5)
LR7-48HJBB-xxxM (xxx=425-455, in step of 5)
LR7-36HJBB-xxxM (xxx=315-345, in step of 5)
LR7-32HJBB-xxxM (xxx=280-310, in step of 5)
xxx is standing for rated output power at STC.

TÜV SÜD Product Service GmbH • Certification Body • Ridlerstraße 65 • 80339 Munich • Germany

TÜV®

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ СЕРТИФИКАТ ◆ CERTIFICADO ◆ CERTIFICAT

Product Service

C E R T I F I C A T E

No. Z2 099333 0044 Rev. 26

Parameters:

Test method of Salt mist test:	Test method 6
Safety Class:	Class II
Maximum System Voltage:	1500 V DC
Construction:	Framed or frameless, with Junction box, cable and connector.
Fire Safety Class:	Class C according to UL790

Tested according to:

IEC 61215-1:2021
IEC 61215-1-1:2021
IEC 61215-2:2021
IEC 61730-1:2023
IEC 61730-2:2023
IEC 61701:2020

TÜV SÜD Product Service GmbH • Certification Body • Ridlerstraße 65 • 80339 Munich • Germany

TÜV®