



# SCB-R320A-41


- Maximum 4 batteries connected in parallel to meet various capacity requirements
- Robust high-current handling for reliable performance
- IP65 protection level, waterproof and dustproof



## Small size and light weight



## 4inputs 1outputs

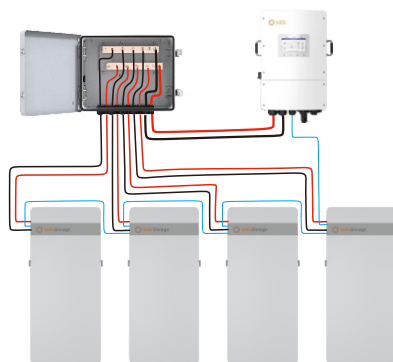

| Model                 | SCB-R320A-41  |
|-----------------------|---------------|
| Rated Input Voltage   | DC 30V~1000V  |
| Max. Input Current    | 250A          |
| Input Circuits        | 4             |
| Output Circuit        | 1             |
| Protection Level      | IP65          |
| Operating Temperature | -30°C~70°C    |
| Net Weight            | 10kg (TBD)    |
| Installation          | Wall-mounted  |
| Dimension[W/D/H]      | 430/340/150mm |