

# DUNKER65-LED

# IP 65



**Application:** DUNKER65-LED dustproof light fixtures are designed especially for areas with requirements for higher level of protection degree (IP), i.e. stock and production halls. This solution enables the replacement of light sources without using tools. Regarding to the luminous characteristic and excellent efficiency, the light fixtures are suitable for high ceiling environments.

**Ballast:** EP – electronic ballast 220-240V/50-60 Hz AC, 220-240V DC

**Body:** White painted metal sheet (RAL 9003)


**Optics:** S – PMMA optics with wide radiant luminous characteristics  
H – PMMA optics with deep radiant luminous characteristics

**Cover:** Hardened safety thermally toughened HST glass

**Connection:** via GESIS connector


**Standard equipment:** 4 pcs suspension brackets M5, GESIS connector

**On request:** **3000 K, 5000 K, 6000 K**  
**DIM** – dimmable electronic ballast (DSI, DALI)  
**RAL** – another colour finishing

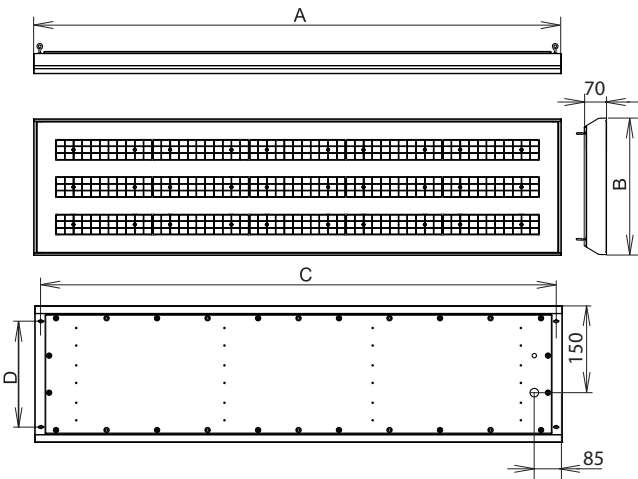


		Tc/A	(lm)*	(W)**	Ar&Cθ (mm)
<b>- electronic ballast - 350 mA</b>					
056800	DUNKER65-LED-H5-8185-4K	4000	8185	63	1566x179x1530x88
056801	DUNKER65-LED-H10-16370-4K	4000	16370	125	1566x292x1530x201
056802	DUNKER65-LED-H12-19644-4K	4000	19644	150	1278x405x1242x314
056803	DUNKER65-LED-H15-24555-4K	4000	24555	190	1566x405x1530x314
056804	DUNKER65-LED-H20-32740-4K	4000	32740	250	1566x518x1530x427
056805	DUNKER65-LED-S5-8185-4K	4000	8185	63	1566x179x1530x88
056806	DUNKER65-LED-S10-16370-4K	4000	16370	125	1566x292x1530x201
056807	DUNKER65-LED-S12-19644-4K	4000	19644	150	1278x405x1242x314
056808	DUNKER65-LED-S15-24555-4K	4000	24555	190	1566x405x1530x314
056809	DUNKER65-LED-S20-32740-4K	4000	32740	250	1566x518x1530x427

DUNKER65-LED-S, IP65

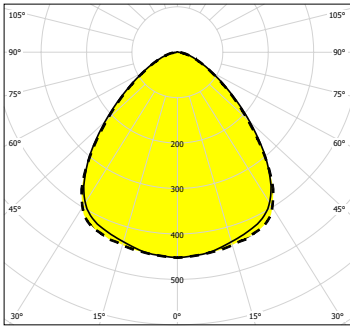

— C0-C180      - - - - C90-C270

DUNKER65-LED-H, IP65

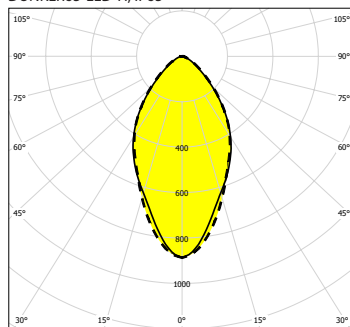

— C0-C180      - - - - C90-C270