

DUNKER65-LED-L

IP 65

INDUSTRIAL LIGHTING FIXTURES



Application: Dustproof light fixture DUNKER65-LED is designed especially for areas with requirements for higher level of protection degree (IP), i.e. stock and production halls, sports hall. Regarding to the luminous characteristic and excellent efficiency, the lighting fixture is suitable for installation in premises with high ceilings.

Ballast: EP – electronic ballast 220-240 V/ 50-60 Hz AC, 176-280 V DC

Těleso: Painted metal sheet RAL 9003

Cover: Thermally toughened soda-lime-silicate safety glass– HST

Fastening: Fastening on ceiling be means of ceiling brackets.

Connection: GESIS connector


Standard equipment: 4pcs suspension brackets M5 , GESIS connector

On request:

DIM – dimmable electronic ballast (1-10V, DSI, DALI)

RAL – another colour finishing

3000 K, 5000 K, 6000 K - colour temperature

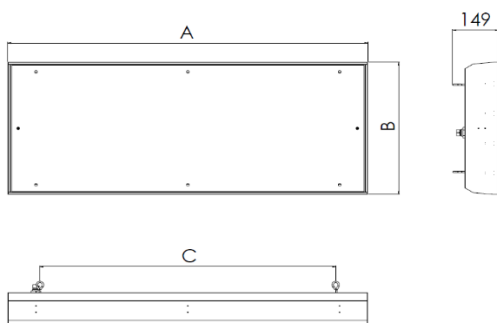

Icon	Icon	TcA	(lm)*	(W)**	AxBxC (mm)
------	------	-----	-------	-------	------------

electronic ballast 300mA					
56850	DUNKER65-LED-L-33600-4K, IP65	4000	33600	242	1185x455x980
56851	DUNKER65-LED-L-25200-4K, IP65	4000	25200	181	1185x355x980
56852	DUNKER65-LED-L-16800-4K, IP65	4000	16800	121	625x455x420

(lm)* - luminous flux , (W)** - input power

DUNKER65-LED-L

