



Catalogue



The right
product
for each
application!



Hotels

Pre-manufactured houses

Industrial buildings

Municipal facilities

Logistics buildings

Care equipment

Commercial constructions

Cruise ships

Family houses

Multi-family houses

Hospitals

Logistics buildings




Non-replaceable! Human life – our most valuable commodity requires the highest precision. This is why all PEHA sockets have obvious colour marking. Dangerous replacements after paint or maintenance works are therefore practically impossible. It is clear that you cannot do it wrong with PEHA hospital installation material.

Hygiene In very busy buildings, the risk of transmitting diseases is high. In order to minimize this risk, the PEHA switch surfaces are easy to clean and if required, they may be equipped with an anti-bacterial coating, that fights harmful bacteria effectively.

Everything under control – by a green LED! PEHA delivers sockets with voltage display in LED technology. The green LEDs in the PEHA sockets SCHUKO® indicate operating condition, according to the DIN EN 60601-1 (VDE 0750-1) standard. The LED technology excels in the expressly high light power and for 10 years it is maintenance-free to operate.

Grounding brackets The grounding brackets of the PEHA sockets excel in a high contact force and the expressly high conductivity. The grounding bracket from phosphorus bronze provide up to 1500 grams of contact force, to ensure holding pressure – where the nickel finish provides excellent conductivity.

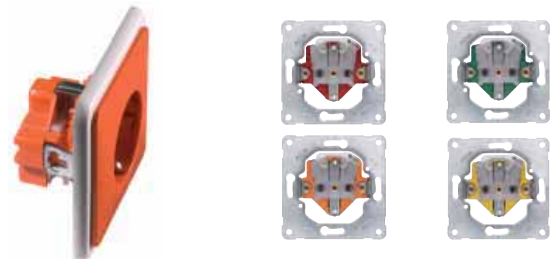

Hospital/
EDV devices

Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.
Colour code				
03/w = white, similar to RAL 1013	33 = orange, similar to RAL 2004		362 = red high-gloss, similar to RAL 3003	
02 = pure white, similar to RAL 9010	332 = orange high-gloss, similar to RAL 2004		42 = green, similar to RAL 6029	
31 = yellow, similar to RAL 1003	36 = red, similar to RAL 3003		422 = green high-gloss, similar to RAL 6029	

The sorting

of different products takes place in the order of the switch programme. It is about the extensions to the existing programmes:

STANDARD
from page 89



DIALOG
from page 111







AURA
from page 123





NOVA
from page 133









Installation example









 <p>Unbreakable socket SCHUKO® pull-proof by dowel fixture, with cover plate 100 x 100 mm</p>					
	<p>consisting of: unbreakable socket SCHUKO®</p>	white	10	D 80.6511 UB w	00704311
<p>same, with child protection</p>	pure white	10	D 80.6511.02 UB	00706311	
<p>same, with child protection and labeling field 7 x 44 mm</p>	white	10	D 80.6511 UB Si w	00704411	
<p>and: Cover 100 x 100 mm, unbreakable, with metal supporting frame, dowels and screws.</p>	pure white	10	D 80.6511.02 UB Si	00706421	
<p>Additional unbreakable sockets SCHUKO® see STANDARD programme.</p>	white	10	D 80.6511 UB Si Na w	00704511	
<p>Labeling sheets for laser printer see page 22.</p>	pure white	10	D 80.6511.02 UB Si Na	00706511	
 <p>Unbreakable Export socket with earth pin pull-proof by dowel fixture, with cover plate 100 x 100 mm, with metal supporting frame</p>	white	10	D 80.671/100 UB w	00703011	
<p>consisting of: unbreakable socket, with child protection and labeling field 7 x 44 mm</p>	pure white	10	D 80.671/100.02 UB	00707811	
<p>and: Cover 100 x 100 mm, unbreakable, with metal supporting frame, dowels and screws.</p>	white	10	B 80.6671 Na Si w	00480941	
<p>Labeling sheets for laser printer see page 22.</p>	pure white	10	B 80.6671.02 Na Si	00489441	
	white	10	D 80.671/100 UB w	00703011	
	pure white	10	D 80.671/100.02 UB	00707811	







Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.	
Combination frames STANDARD-Inline for channel installation with small outer radii, for vertical and horizontal installation 1-gang, dimensions 81 x 81 mm 2-gang, dimensions 81 x 152 mm 3-gang, dimensions 81 x 223 mm <i>Additional combination frames STANDARD Page 91</i> <i>Combination frames DIALOG Page 112</i> <i>Combination frames AURA Page 124</i> <i>Combination frames NOVA Page 134</i>	orange	10	D 80.571.33	00298111	
	green	10	D 80.571.42	00299111	
	red	10	D 80.571.36	00270111	
	yellow	10	D 80.571.31	00553111	
	orange	10	D 80.572.33	00298211	
	green	10	D 80.572.42	00299211	
	red	10	D 80.572.36	00270211	
	yellow	10	D 80.572.31	00553211	
	orange	10	D 80.573.33	00298311	
	green	10	D 80.573.42	00299311	
	red	10	D 80.573.36	00270311	
	yellow	10	D 80.573.31	00553311	
Combination frames STANDARD for vertical and horizontal installation 1-gang, dimensions 81 x 81 mm 2-gang, dimensions 81 x 152 mm 3-gang, dimensions 81 x 223 mm <i>Additional combination frames STANDARD Page 91</i> <i>Combination frames DIALOG Page 112</i> <i>Combination frames AURA Page 124</i> <i>Combination frames NOVA Page 134</i>	orange	10	D 80.671 or	00197111	
	green	10	D 80.671 grün	00564111	
	red	10	D 80.671 rot	00552111	
	yellow	10	D 80.671 gelb	00554111	
	orange	10	D 80.672 or	00197211	
	green	10	D 80.672 grün	00564211	
	red	10	D 80.672 rot	00552211	
	yellow	10	D 80.672 gelb	00554211	
	orange	10	D 80.673 or	00197311	
	green	10	D 80.673 grün	00564311	
	red	10	D 80.673 rot	00552311	
	yellow	10	D 80.673 gelb	00554311	
Surface-mounting box for STANDARD combination frames D 80.671 to D 80.673 for vertical and horizontal installation 1-gang, dimensions B 81 x L 81 x H 33 mm 2-gang, dimensions B 81 x L 152 x H 33 mm 3-gang, dimensions B 81 x L 223 x H 33 mm <i>Additional surface-mounting boxes STANDARD Page 94</i> <i>Surface-mounting boxes DIALOG Page 116</i> <i>Surface-mounting boxes NOVA Page 139</i>	red	10	D 80.691 rot	00552611	
	red	5	D 80.692 rot	00552711	
	red	5	D 80.693 rot	00552811	
Rocker 48 x 41 mm STANDARD programme with white central plate, with labeling field 7 x 44 mm, for switch 1-pole, universal switch (1-way/2-way switch), intermediate switch, pushbutton switch for combinations Labeling sheets for laser printer see page 22.	white/white	10	D 81.640 Na	00182011	
	white/red	10	D 81.640.03 Na rot	00182021	
	white/green	10	D 81.640.03 Na grün	00182031	
	white/orange	10	D 81.640.03 Na orange	00182041	
	pure white/ pure white	10	D 81.640.02 Na	00205911	
Rocker 48 x 41 mm STANDARD programme with white central plate, with labeling field 7 x 44 mm, for switch 2- and 3-pole for combinations Labeling sheets for laser printer see page 22.	white/white	10	D 81.642 Na	00184311	
	white/red	10	D 81.642.03 Na rot	00182051	
	white/green	10	D 81.642.03 Na grün	00182061	
	white/orange	10	D 81.642.03 Na orange	00182071	
	pure white/ pure white	10	D 81.642.02 Na	00206011	
	red/red	10	D 81.642.36 Na	00182121	
Rocker 48 x 41 mm STANDARD programme with white central plate, with labeling field 7 x 44 mm, for switch Series bridged switch, universal switch (1-way/2-way switch), series bridged pushbutton for combinations Labeling sheets for laser printer see page 22.	white/white	10	D 81.645 Na	00204611	
	white/red	10	D 81.645.03 Na rot	00182081	
	white/green	10	D 81.645.03 Na grün	00182091	
	white/orange	10	D 81.645.03 Na orange	00182101	
	pure white/ pure white	10	D 81.645.02 Na	00204911	

Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.
 <p>Rocker 48 x 41 mm STANDARD programme with white central plate, with labeling field 7 x 44 mm and control light, for switch 1-pole, universal switch (1-way/2-way switch), intermediate switch, pushbutton switch for combinations</p>	white/white white/red white/green white/orange pure white red/red	10 10 10 10 10 10	D 81.640 GLK Na	00204511
			D 81.640.03 GLK Na rot	00182131
			D 81.640.03 GLK Na grün	00182141
			D 81.640.03 GLK Na orange	00182151
			D 81.640.02 GLK Na	00204811
			D 81.640.36 GLK Na	00182181
			Labeling sheets for laser printer see page 22.	
 <p>Heart alarm pushbutton consisting of 2-way pushbutton D 556 GLK and filament lamp element D Glü 505/24, for single installation, with 24 V~ permanent light, with red cover, with labeling field 7 x 44 mm and clear hinged cover</p>	red/white	10	D 81.556 V K Herz	00191911
			Labeling sheets for laser printer see page 22.	
 <p>Pullcord 2-way pushbutton switch 24 V~ with permanent light, STANDARD, with central plate for combinations</p> <p>When using the glow lamp element article no. D GL 505 also suitable for 230 V~.</p>	white pure white	10 10	D 80.556 GLK/24 Z w	00193911
			D 80.556.02 GLK/24 Z	00194611
 <p>Alarm pushbutton 1-pole, NO, for single installation, with rocker and clear, unbreakable hinged cover, consisting of: pushbutton switch 230 V AC</p> <p>or pushbutton switch with control light 230 V AC</p> <p>or pushbutton switch with control light 24 V AC</p>	white clear	10 10 10	D 556	00193511
			D 81.640 REA	00182161
			D 80.686 klar	00210011
	white clear	10 10 10	D 550 GLK	00193711
			D 81.640 GLK REA	00182171
			D 80.686 klar	00210011
	white clear	10 10	D 550 GLK/24V	00193811
			D 81.640 GLK REA	00182171
	D 80.686 klar	00210011		
	 <p>Hospital socket with earth terminal block In class 1, 2 and 3 medical rooms, the grounding wires of the sockets shall be connected to the central grounding point of the given room. The size of the resistance of the grounding contact to the central grounding point is provided by the NEN 1010-7/A3:2005 and NEN 1010:2007 standards. PEHA has developed a socket specially for class 2 and 3 rooms, that allows for the direct 6 mm²-connection! The socket carries the KEMA-certificate (no. 2114920.01) and is approved by TNO (no. PG/TG/98.142).</p>			
 <p>Socket SCHUKO® STANDARD with central plate for combinations, 2-pole, 10/16 A 250 V. Connection for a 6 mm² grounding</p> <p>same, with child protection</p> <p>same, with child protection and labeling field 7 x 44 mm</p> <p>Labeling sheets for laser printer see page 22.</p>	white pure white pure white pure white	10 10 10 10	H 80.6511 EK6 w	00790621
			H 80.6511.02 EK6	00790721
			H 80.6511.02 Si EK6	00792221
			H 80.6511.02 Si Na EK6	00792621
 <p>Socket SCHUKO® STANDARD with green socket Connection for a 6 mm² grounding, with LED control light and green socket, 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with child protection, with labeling field 7 x 44 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	green	10	D 80.6511.42 Si Na LED EK6	00786661
 <p>Socket SCHUKO® STANDARD with orange socket Connection for a 6 mm² grounding, with LED control light and orange socket, 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with child protection, with labeling field 7 x 44 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	orange	10	H 80.6511.33 Si Na LED EK6	00786621

Hospital/EDP installation devices




Article Designation	Colour	Packed	Article no.	Code no.	
Socket SCHUKO® DIALOG with central plate for combinations 2-pole, 16 A 250 V. Connection for a 6 mm ² grounding	white pure white	10 10	H 95.6511.03 EK6 H 95.6511.02 EK6	00830421 00817321	
Socket SCHUKO® NOVA with screw terminals with central plate for combinations, with connection terminals according to VDE 0620, 2-pole, 16 A 250 V~, connection for a 6 mm ² grounding	NOVA pure white	10	H 20.6611.022 EK6	00033021	
same, with hinged cover	NOVA pure white	10	H 20.6611.022 K EK6	00033061	
Export socket NOVA with screw terminals and earth pin with central plate for combinations, 2-pole, 16 A 250 V~, connection for a 6 mm ² grounding	NOVA pure white	10	B 20.6671.022 Si EK6	00033141	
Socket SCHUKO® STANDARD with plug-in terminals, LED control light, with label "SV" and green socket for "emergency power supply", 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with green central plate for combinations	green	10	D 80.6511.42 LED/4 SV	00785011	
same, with labeling field 7 x 44 mm	green	10	D 80.6511.42 LED/4 Na SV	00785111	
same, with hinged cover	green	10	D 80.6511.42 K LED/4 SV	00785211	
same, with hinged cover and labeling field 10 x 49 mm	green	10	D 80.6511.42 K LED/4 Na SV	00785311	
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.					
Socket SCHUKO® STANDARD with screw terminals, with label "SV" and green socket for "emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, for single installation, with green cover plate	green	10	D 80.6611 V grün SV	00800911	
with green central plate for combinations	green	10	D 80.6611 grün SV	00800011	
same, with labeling field 7 x 44 mm	green	10	D 80.6611 Na grün SV	00800111	
same, with child protection	green	10	D 80.6611 Si grün SV	00800611	
same, with control light	green	10	D 80.6611 GLK grün SV	00800211	
same, with control light and labeling field 7 x 44 mm	green	10	D 80.6611 GLK Na grün SV	00800311	
same, unbreakable, with labeling field 7 x 44 mm, with child protection	green	10	D 80.6611 UB Si Na grün SV	00705011	
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.					
Socket SCHUKO® STANDARD with screw terminals, with label "SV" and green socket, with hinged cover, unbreakable for "emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with green central plate for combinations	green	10	D 80.6611 K grün SV	00801011	
same, with labeling field 10 x 49 mm	green	10	D 80.6611 K Na grün SV	00801111	
same, with child protection	green	10	D 80.6611 K Si grün SV	00801411	
same, with control light	green	10	D 80.6611 K GLK grün SV	00801211	
same, with control light and labeling field 10 x 49 mm	green	10	D 80.6611 K GLK Na grün SV	00801311	
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.					

Hospital/EDP installation devices

	Article Designation	Colour	Packed	Article no.	Code no.
	Socket SCHUKO® STANDARD with plug-in terminals and green socket 2-pole, 16 A 250 V~, with green central plate for combinations	green	10	D 80.6511 grün	00795111
	same, with labeling field 7 x 44 mm	green	10	D 80.6511 Na grün	00795611
	same, with child protection	green	10	H 80.6511 Si grün	00796121
	same, with child protection and labeling field 7 x 44 mm	green	10	H 80.6511.42 Si Na	00567541
	Labeling sheets for laser printer see page 22.				
	Socket SCHUKO® STANDARD with screw terminals and green socket 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620				
	for single installation, with green cover plate	green	10	D 80.6611 V grün	upon request
	with green central plate for combinations	green	10	D 80.6611 grün	00567011
	same, with labeling field 7 x 44 mm	green	10	H 80.6611 Na grün	00567921
	same, with child protection	green	10	H 80.6611 Si grün	00567121
	same, with control light	green	10	D 80.6611 GLK grün	00567321
	same, with child protection and labeling field 7 x 44 mm	green	10	D 80.6611 GLK Na grün	00568211
	For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.				
	Socket SCHUKO® STANDARD, unbreakable, with screw terminals, green socket and hinged cover 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, for combinations	green	10	H 80.6611 K grün	00567221
	same, with control light and labeling field 10 x 49 mm	green	10	D 80.6611 K GLK Na grün	00568011
	For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.				
	Socket SCHUKO® STANDARD with LED control light and green socket 2-pole, 16 A 250 V~, with plug-in terminals, 0 with green LED as a voltage indicator, 230 V~/1 mA, 230 V~/1 mA, LED lifetime appr. 10 years, with green central plate for combinations	green	10	H 80.6511.42 LED/4	00785421
	same, with labeling field 7 x 44 mm	green	10	H 80.6511.42 LED/4 Na	00785521
	same, with child protection and labeling field 7 x 44 mm	green	10	H 80.6511.42 Si Na LED/4	00788861
	same, with hinged cover, unbreakable	green	10	H 80.6511.42 K LED/4	00785621
	same, with hinged cover and labeling field 10 x 49 mm	green	10	H 80.6511.42 K LED/4 Na	00785721
	For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.				
	Export socket STANDARD with screw terminals, earth pin and green socket 2-pole, 16 A 250 V~, for 58 series installation boxes, with green central plate for combinations and child protection	green	10	B 80.6671 Si grün	00483041
	same, with labeling field 7 x 44 mm	green	10	B 80.6671 Na Si grün	00411041
	same, with control light	green	10	B 80.6671 Si GLK grün	00483341
	same, with control light and labeling field 7 x 44 mm	green	10	B 80.6671 GLK Na Si grün	00483641
	same, with LED control light and labeling field 7 x 44 mm	green	10	B 80.6571.42 LED/4 Na Si	00482541
	For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.				

Belgian sockets in a different colour upon request.

Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.	
Export socket STANDARD, unbreakable, with screw terminals, earth pin, green socket and hinged cover 2-pole, 16 A 250 V~ with green central plate for combinations and child protection same, with labeling field 10 x 49 mm same, with control light For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.	green	10	B 80.6671 K Si grün	00481841	
	green	10	B 80.6671 K Si Na grün	00484341	
	green	10	B 80.6671 K Si GLK grün	00484401	
Export socket STANDARD, unbreakable, with screw terminals, earth pin, green socket and hinged cover, IP 44 2-pole, 16 A 250 V~ with green central plate for combinations and child protection	green	10	B 80.6671 K WU Si grün	00484461	
Export socket STANDARD, unbreakable, with screw terminals, earth pin, green socket and hinged cover, IP 44 2-pole, 16 A 250 V~ with green central plate for combinations, child protection and labeling field 10 x 49 mm same, with control light For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.	green	10	B 80.6671 K WU Na Si grün	00470741	
	green	10	B 80.6671 K WU Si GLK grün	00484521	
Socket SCHUKO® STANDARD with plug-in terminals, LED control light, with label "ZSV" and orange socket for "additional emergency power supply", 2-pole, 16 A 250 V~, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with orange central plate for combinations same, with labeling field 7 x 44 mm same, with hinged cover, unbreakable same, with hinged cover and labeling field 10 x 49 mm For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.	orange	10	D 80.6511.33 LED/4 ZSV	00785811	
	orange	10	D 80.6511.33 LED/4 Na ZSV	00785911	
	orange	10	D 80.6511.33 K LED/4 ZSV	00786011	
	orange	10	D 80.6511.33 K LED/4 Na ZSV	00786111	
Socket SCHUKO® STANDARD with screw terminals, with label "ZSV" and orange socket for "additional emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, for single installation, with orange cover plate with orange central plate for combinations same, with labeling field 7 x 44 mm same, with child protection same, with control light same, with control light and labeling field 7 x 44 mm For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.	orange	10	D 80.6611 V or ZSV	00805911	
	orange	10	D 80.6611 or ZSV	00805011	
	orange	10	D 80.6611 Na or ZSV	00805111	
	orange	10	D 80.6611 Si or ZSV	00805611	
	orange	10	D 80.6611 GLK or ZSV	00805211	
	orange	10	D 80.6611 GLK Na or ZSV	00805311	
Socket SCHUKO® STANDARD with screw terminals, with label "ZSV" and orange socket, with hinged cover, unbreakable for "additional emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with orange central plate for combinations same, with labeling field 10 x 49 mm same, with control light same, with control light and labeling field 10 x 49 mm For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.	orange	10	D 80.6611 K or ZSV	00806011	
	orange	10	D 80.6611 K Na or ZSV	00806111	
	orange	10	D 80.6611 K GLK or ZSV	00806211	
	orange	10	D 80.6611 K GLK Na or ZSV	00806311	






Hospital/EDP installation devices

	Article Designation	Colour	Packed	Article no.	Code no.
	<p>Export socket STANDARD with screw terminals, earth pin and orange socket 2-pole, 16 A 250 V~, for 58 series installation boxes with orange central plate for combinations and child protection</p> <p>same, with labeling field 7 x 44 mm</p> <p>same, with control light</p> <p>same, with control light and labeling field 7 x 44 mm</p> <p>same, with LED control light and labeling field 7 x 44 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	orange	10	B 80.6671 Si or	00483141
		orange	10	B 80.6671 Na Si or	00411241
		orange	10	B 80.6671 Si GLK or	00483441
		orange	10	B 80.6671 GLK Na Si or	00483741
		orange	10	B 80.6571.33 LED/4 Na Si	00482441
	<p>Export socket STANDARD, unbreakable, with screw terminals, earth pin, orange socket and hinged cover 2-pole, 16 A 250 V~ with orange central plate for combinations and child protection</p> <p>same, with labeling field 10 x 49 mm</p> <p>same, with labeling field 10 x 49 mm and control light</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	orange	10	B 80.6671 K Si orange	00484301
		orange	10	B 80.6671 K Si Na orange	00484361
		orange	10	B 80.6671 K Si GLK orange	00484421
	<p>Export socket STANDARD, unbreakable, with screw terminals, earth pin, orange socket and hinged cover, IP 44 2-pole, 16 A 250 V~ with orange central plate for combinations and child protection</p>	orange	10	B 80.6671 K WU Si orange	00484481
	<p>Export socket STANDARD, unbreakable, with screw terminals, earth pin, orange socket and hinged cover, IP 44 2-pole, 16 A 250 V~ with orange central plate for combinations, child protection and labeling field 10 x 49 mm</p> <p>same, with central plate, hinged cover and control light</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	orange	10	B 80.6671 K WU Na Si orange	00484501
		orange	10	B 80.6671 K WU Si GLK orange	00484541
	<p>Socket SCHUKO® STANDARD with screw terminals and red socket 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with red central plate for combinations</p> <p>same, with labeling field 7 x 44 mm</p> <p>same, with control light and labeling field 7 x 44 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	red	10	D 80.6611 rot	00555011
		red	10	D 80.6611 Na rot	00551711
		red	10	D 80.6611 GLK Na rot	00551811
	<p>Sockets SCHUKO® STANDARD with screw terminals, with label "EDV" and red socket, especially suitable for use in EDV areas 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with red central plate for combinations</p> <p>same, with labeling field 7 x 44 mm</p> <p>same, with control light</p> <p>same, with control light and labeling field 7 x 44 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	red	10	D 80.6611 rot EDV	00810011
		red	10	D 80.6611 Na rot EDV	00810111
		red	10	D 80.6611 GLK rot EDV	00810211
		red	10	D 80.6611 GLK Na rot EDV	00810311







Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.		
<p>Socket SCHUKO® STANDARD with plug-in terminals and red socket, especially suitable for use in EDV areas 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with red central plate for combinations</p> <p>same, with labeling field 7 x 44 mm</p> <p>same, with child protection</p> <p>same, with child protection and labeling field 7 x 44 mm</p> <p>same, with hinged cover</p> <p>Labeling sheets for laser printer see page 22.</p>	red	10	D 80.6511 rot	00795011		
	red	10	D 80.6511 Na rot	00795511		
	red	10	D 80.6511 Si rot	00796011		
	red	10	D 80.6511.36 Na Si	00567551		
	red	10	D 80.6511 K rot	00796511		
<p>Sockets SCHUKO® STANDARD with plug-in terminals, with label "EDV" and red socket, especially suitable for use in EDV areas 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with red central plate for combinations</p>	red	10	D 80.6511 rot EDV	00795311		
<p>2-gang socket SCHUKO® STANDARD with plug-in terminals 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with full cover plate for single installation</p> <p>Especially suitable for time-saving installation in 2-gang trunking boxes.</p>	red	5	D 80.6512/3.36	00489111		
<p>3-gang socket SCHUKO® STANDARD with plug-in terminals 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with full cover plate for single installation, suitable for 3 angled or flat plugs</p> <p>Especially suitable for time-saving installation in 2-gang trunking boxes.</p>	red	5	D 80.6513.36	00489011		
<p>Socket SCHUKO® STANDARD with screw terminals and red socket 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620</p> <p>for single installation, with red cover plate</p> <p>same, with labeling field 7 x 44 mm</p> <p>same, with child protection</p> <p>same, with control light</p> <p>same, with child protection and labeling field 7 x 44 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	red	10	D 80.6611 V rot	upon request		
	red	10	D 80.6611 Na rot	00551711		
	red	10	H 80.6611 Si rot	00555121		
	red	10	D 80.6611 GLK rot	00551611		
	red	10	D 80.6611 GLK Na rot	00551821		
<p>Socket SCHUKO® STANDARD, unbreakable, with screw terminals, red socket and hinged cover 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, for combinations</p>	red	10	H 80.6611 K rot	00555221		

Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.
 <p>Socket SCHUKO® STANDARD with LED control light and red socket 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, 230 V~/1 mA, LED lifetime appr. 10 years, with red central plate for combinations</p>	red	10	H 80.6511.36 LED/4	00786221
	red	10	H 80.6511.36 LED/4 Na	00786321
	red	10	D 80.6511.36 Si Na LED/4	00788871
	red	10	H 80.6511.36 K LED/4 Na	00786521
	red	10	H 80.6511.36 K LED/4 Na Si	00786521
<p>same, with labeling field 7 x 44 mm</p> <p>same, with child protection and labeling field 7 x 44 mm</p> <p>same, with control light and labeling field 10 x 49 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>				
 <p>Export socket STANDARD with screw terminals, earth pin and red socket 2-pole, 16 A 250 V~, for 58 series installation boxes, with red central plate for combinations and child protection</p>	red	10	B 80.6671 Si rot	00481041
	red	10	B 80.6671 Na Si rot	00411141
	red	10	B 80.6671 Si GLK rot	00483241
	red	10	B 80.6671 GLK Na Si rot	00483541
	red	10	B 80.6571.36 LED/4 Na Si	00467141
<p>same, with labeling field 7 x 44 mm</p> <p>same, with control light</p> <p>same, with control light and labeling field 7 x 44 mm</p> <p>same, with LED control light and labeling field 7 x 44 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>				
 <p>Export socket STANDARD, unbreakable, with screw terminals, earth pin, red socket and hinged cover 2-pole, 16 A 250 V~ with red central plate for combinations and child protection</p>	red	10	B 80.6671 K Si rot	00484321
	red	10	B 80.6671 K Si Na rot	00484381
	red	10	B 80.6671 K Si GLK rot	00484441
<p>same, with labeling field 10 x 49 mm</p> <p>same, with control light</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>				
 <p>Socket SCHUKO® STANDARD with plug-in terminals, LED control light and yellow socket 2-pole, 16 A 250 V~, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with yellow central plate for combinations</p>	yellow	10	D 80.6511.31 LED/4	00784021
	yellow	10	D 80.6511.31 LED/4 Na	00784121
	yellow	10	D 80.6511.31 Si Na LED/4	00788881
<p>same, with labeling field 7 x 44 mm</p> <p>same, with child protection and labeling field 7 x 44 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>				
 <p>Socket SCHUKO® STANDARD with plug-in terminals and yellow socket 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with yellow central plate for combinations</p>	yellow	10	D 80.6511.31	00783721
	yellow	10	D 80.6511.31 Na	00783821
	yellow	10	D 80.6511.31 Si	00783921
	yellow	10	H 80.6511.31 Si Na	00567531
<p>same, with labeling field 7 x 44 mm</p> <p>same, with child protection</p> <p>same, with child protection and labeling field 7 x 44 mm</p> <p>Labeling sheets for laser printer see page 22.</p>				







Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.			
Socket SCHUKO® DIALOG with plug-in terminals, LED control light, with label "SV" and green socket for "emergency power supply", 2-pole, 16 A 250 V~, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with green central plate for combinations	green	10	D 95.6511.42 LED/4 SV	00884811			
	same, with labeling field 7 x 64 mm	green	10	D 95.6511.42 LED/4 Na SV			00884911
	same, with hinged cover, unbreakable	green	10	D 95.6511.42 K LED/4 SV			00885011
	same, with hinged cover and labeling field 7 x 64 mm	green	10	D 95.6511.42 K LED/4 Na SV			00885111
	For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.						
Socket SCHUKO® DIALOG with screw terminals, with label "SV" and green socket for "emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with green central plate for combinations	green	10	D 95.6611.42 SV	00890211			
	same, with labeling field 7 x 64 mm	green	10	D 95.6611.42 Na SV			00890311
	same, with control light	green	10	D 95.6611.42 GLK SV			00890411
	same, with control light and labeling field 7 x 64 mm	green	10	D 95.6611.42 GLK Na SV			00890511
	For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.						
Socket SCHUKO® DIALOG with screw terminals, with label "SV", green socket and hinged cover, unbreakable for "emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with green central plate for combinations	green	10	D 95.6611.42 K SV	00890611			
	same, with labeling field 7 x 64 mm	green	10	D 95.6611.42 K Na SV			00890711
	same, with control light	green	10	D 95.6611.42 K GLK SV			00890811
	same, with control light and labeling field 7 x 64 mm	green	10	D 95.6611.42 K GLK Na SV			00890911
	For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.						
Socket SCHUKO® DIALOG with screw terminals and green socket 2-pole, 16 A 250 V~, with green central plate for combinations	green	10	H 95.6611.42	00812121			
	same, with labeling field 7 x 64 mm	green	10	H 95.6611.42 Na			00812221
	same, with control light	green	10	H 95.6611.42 GLK			00812321
	same, with control light and labeling field 7 x 64 mm	green	10	H 95.6611.42 GLK Na			00812421
	For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.						
Socket SCHUKO® DIALOG, unbreakable, with screw terminals, green socket and hinged cover 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with green central plate for combinations	green	10	H 95.6611.42 K	00812521			
	same, with control light	green	10	H 95.6611.42 K GLK			00811421
	same, with control light and labeling field 7 x 64 mm	green	10	H 95.6611.42 K GLK Na			00811521
	For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.						
Socket SCHUKO® DIALOG with LED control light and green socket 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, 230 V~/1 mA, LED lifetime appr. 10 years, with green central plate for combinations	green	10	H 95.6511.42 LED/4	00886821			
	same, with labeling field 7 x 64 mm	green	10	H 95.6511.42 LED/4 Na			00886921
	same, with hinged cover, unbreakable	green	10	H 95.6511.42 K LED/4			00887821
	same, with hinged cover and labeling field 7 x 64 mm	green	10	H 95.6511.42 K LED/4 Na			00887921
	For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.						



Hospital/EDP installation devices

	Article Designation	Colour	Packed	Article no.	Code no.
	Socket SCHUKO® DIALOG with plug-in terminals, LED control light, with label "ZSV" and orange socket for "additional emergency power supply", 2-pole, 16 A 250 V~, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with orange central plate for combinations	orange	10	D 95.6511.33 LED/4 ZSV	00885211
	same, with labeling field 7 x 64 mm	orange	10	D 95.6511.33 LED/4 Na ZSV	00885311
	same, with hinged cover, unbreakable	orange	10	D 95.6511.33 K LED/4 ZSV	00885411
	same, with hinged cover and labeling field 7 x 64 mm	orange	10	D 95.6511.33 K LED/4 Na ZSV	00885511
	For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.				
	Socket SCHUKO® DIALOG with screw terminals, with label "ZSV" and orange socket for "additional emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with orange central plate for combinations	orange	10	D 95.6611.33 ZSV	00891011
	same, with labeling field 7 x 64 mm	orange	10	D 95.6611.33 Na ZSV	00891111
	same, with control light	orange	10	D 95.6611.33 GLK ZSV	00891211
	same, with control light and labeling field 7 x 64 mm	orange	10	D 95.6611.33 GLK Na ZSV	00891311
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.					
	Socket SCHUKO® DIALOG with screw terminals, with label "ZSV", orange socket and hinged cover, unbreakable for "additional emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with orange central plate for combinations	orange	10	D 95.6611.33 K ZSV	00891411
	same, with labeling field 7 x 64 mm	orange	10	D 95.6611.33 K Na ZSV	00891511
	same, with control light	orange	10	D 95.6611.33 K GLK ZSV	00891611
	same, with control light and labeling field 7 x 64 mm	orange	10	D 95.6611.33 K GLK Na ZSV	00891711
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.					
	Socket SCHUKO® DIALOG with plug-in terminals and red socket 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with red central plate for combinations	red	10	D 95.6511.36	00859611
	same, with labeling field 7 x 64 mm	red	10	D 95.6511.36 Na	00859811
Labeling sheets for laser printer see page 22.					
	Socket SCHUKO® DIALOG with screw terminals and red socket 2-pole, 16 A 250 V~, with red central plate for combinations	red	10	H 95.6611.36	00811621
	same, with labeling field 7 x 64 mm	red	10	H 95.6611.36 Na	00811721
	same, with control light	red	10	H 95.6611.36 GLK	00811821
	same, with control light and labeling field 7 x 64 mm	red	10	H 95.6611.36 GLK Na	00811921
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.					
	Socket SCHUKO® DIALOG, unbreakable, with screw terminals, red socket and hinged cover 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with red central plate for combinations	red	10	H 95.6611.36 K	00812721
	same, with labeling field 7 x 64 mm	red	10	H 95.6611.36 K Na	00812821
	same, with control light and labeling field 7 x 64 mm	red	10	H 95.6611.36 K GLK Na	00813021
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.					







Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.	
Socket SCHUKO® DIALOG with LED control light and red socket 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, 230 V~/1 mA, LED lifetime appr. 10 years, with red central plate for combinations	red	10	H 95.6511.36 LED/4	00886421	
same, with labeling field 7 x 64 mm	red	10	H 95.6511.36 LED/4 Na	00886521	
same, with hinged cover, unbreakable	red	10	H 95.6511.36 K LED/4	00886621	
same, with hinged cover and labeling field 7 x 64 mm	red	10	H 95.6511.36 K LED/4 Na	00886721	
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.					
Socket SCHUKO® DIALOG with plug-in terminals, LED control light and yellow socket 2-pole, 16 A 250 V~, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with yellow central plate for combinations	yellow	10	D 95.6511.31 LED/4	00854621	
same, with labeling field 7 x 64 mm	yellow	10	D 95.6511.31 LED/4 Na	00854721	
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.					
Socket SCHUKO® DIALOG with plug-in terminals and yellow socket 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with yellow central plate for combinations	yellow	10	D 95.6511.31	00853621	
same, with labeling field 7 x 64 mm	yellow	10	D 95.6511.31 Na	00853721	
Labeling sheets for laser printer see page 22.					
2-gang socket SCHUKO® DIALOG with plug-in terminals 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with full cover plate for single installation, suitable for 2 angled or flat plugs	red green	10 10	D 95.6512/3.36 D 95.6512/3.42	00898311 00799611	
same, with labeling field 7 x 64 mm	red green	10 10	D 95.6512/3.36 Na D 95.6512/3.42 Na	00797811 00799711	
Especially suitable for time-saving installation in 2-gang trunking boxes.					
Labeling sheets for laser printer see page 22.					
3-gang socket SCHUKO® DIALOG with plug-in terminals 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with full cover plate for single installation, suitable for 3 angled or flat plugs	red green	10 10	D 95.6513.36 D 95.6513.42	00880511 00799811	
same, with labeling field 7 x 64 mm	red green	10 10	D 95.6513.36 Na D 95.6513.42 Na	00798611 00799911	
Especially suitable for time-saving installation in 2-gang trunking boxes.					
Labeling sheets for laser printer see page 22.					
Socket SCHUKO® with plug-in terminals, LED control light, with label "SV" and green socket for "emergency power supply", with child protection, 2-pole, 16 A 250 V~, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with green central plate for combinations	AURA NOVA	green green	10 10	D 20.6511.42 LED/4 SV D 20.6511.422 LED/4 SV	
same, with labeling field 7 x 44 mm	AURA NOVA	green green	10 10	D 20.6511.42 LED/4 Na SV D 20.6511.422 LED/4 Na SV	
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.					





Hospital/EDP installation devices

	Article Designation	Colour	Packed	Article no.	Code no.
	<p>Socket SCHUKO® STANDARD with screw terminals, red socket, overvoltage protection and control light with labeling field 7 x 44 mm, for 58 series installation boxes, nominal leakage current: 2,5 kA up to 10 times, with central plate for combinations, without spreading</p> <p>Function: In case of overloading or malfunction of the overvoltage protection, <u>the socket switches off</u>. The control light turns off.</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	<p>red white pure white</p>	<p>1 1 1</p>	<p>D 80.6611 ÜS/25 rot D 80.6611 ÜS/25 w D 80.6611.02 ÜS/25</p>	<p>00232413 00231713 00233013</p>
	<p>Socket SCHUKO® with screw terminals, with label "SV" and green socket for "emergency power supply", with child protection, 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with green central plate for combinations</p> <p>same, with labeling field 7 x 44 mm</p> <p>same, with control light</p> <p>same, with control light and labeling field 7 x 44 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	<p>AURA green NOVA green AURA green NOVA green NOVA green AURA green NOVA green</p>	<p>10 10 10 10 10 10 10</p>	<p>D 20.6611.42 SV D 20.6611.422 SV D 20.6611.42 Na SV D 20.6611.422 Na SV D 20.6611.422 GLK SV D 20.6611.42 GLK Na SV D 20.6611.422 GLK Na SV</p>	<p>00156711 00017211 00156811 00017311 00017411 00157011 00017511</p>
	<p>Socket SCHUKO® NOVA with plug-in terminals and green socket 2-pole, 16 A 250 V~, with green central plate for combinations</p> <p>same, with labeling field 7 x 44 mm</p> <p>same, with hinged cover</p> <p>Labeling sheets for laser printer see page 22.</p>	<p>green green green</p>	<p>10 10 10</p>	<p>H 20.6511.422 H 20.6511.422 Na H 20.6511.422 K</p>	<p>00017821 00017831 00017841</p>
	<p>Socket SCHUKO® NOVA with LED control light and green socket 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, 230 V~/1 mA, LED lifetime appr. 10 years, with green central plate for combinations</p> <p>same, with labeling field 7 x 44 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	<p>green green</p>	<p>10 10</p>	<p>D 20.6511.422 LED/4 D 20.6511.422 LED/4 Na</p>	<p>00017611 00017711</p>
	<p>Export socket NOVA with plug-in terminals, earth pin and green socket 2-pole, 16 A 250 V~, with green central plate for combinations and child protection</p>	<p>green</p>	<p>10</p>	<p>B 20.6571.422 Si</p>	<p>00033441</p>
	<p>Export socket NOVA with plug-in terminals, with LED control light, earth pin and green socket 2-pole, 16 A 250 V~, with green central plate for combinations, child protection and green LED as a voltage indicator, 230 V~/1 mA</p> <p>For replacement lighting elements see page 21.</p>	<p>green</p>	<p>10</p>	<p>B 20.6571.422 Si LED/4</p>	<p>00033741</p>








Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.			
Socket SCHUKO® with plug-in terminals, LED control light, with label "ZSV" and orange socket for "additional emergency power supply", with child protection, 2-pole, 16 A 250 V~, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with orange central plate for combinations	AURA	orange	10	D 20.6511.33 LED/4 ZSV	00158111		
	NOVA	orange	10	D 20.6511.332 LED/4 ZSV	00018011		
	same, with labeling field 7 x 44 mm	AURA	orange	10	D 20.6511.33 LED/4 Na ZSV		00158211
		NOVA	orange	10	D 20.6511.332 LED/4 Na ZSV		00018111
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.							
Socket SCHUKO® with screw terminals, with label "ZSV" and orange socket for "additional emergency power supply", with child protection, 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with orange central plate for combinations	AURA	orange	10	D 20.6611.33 ZSV	00170711		
	NOVA	orange	10	D 20.6611.332 ZSV	00018211		
	same, with labeling field 7 x 44 mm	AURA	orange	10	D 20.6611.33 Na ZSV		00170811
		NOVA	orange	10	D 20.6611.332 Na ZSV		00018311
	same, with control light	AURA	orange	10	D 20.6611.33 GLK ZSV		00170911
		NOVA	orange	10	D 20.6611.332 GLK ZSV		00018411
	same, with control light and labeling field 7 x 44 mm	AURA	orange	10	D 20.6611.33 GLK Na ZSV		00171011
		NOVA	orange	10	D 20.6611.332 GLK Na ZSV		00018511
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.							
Socket SCHUKO® NOVA with plug-in terminals and orange socket 2-pole, 16 A 250 V~, with orange central plate for combinations	orange	10	H 20.6511.332	00018821			
	same, with labeling field 7 x 44 mm	orange	10	H 20.6511.332 Na		00018831	
	same, with hinged cover	orange	10	H 20.6511.332 K		00018841	
Labeling sheets for laser printer see page 22.							
Socket SCHUKO® NOVA with LED control light and orange socket 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, 230 V~/1 mA, LED lifetime appr. 10 years, with orange central plate for combinations	orange	10	D 20.6511.332 LED/4	00018611			
	same, with labeling field 7 x 44 mm	orange	10	D 20.6511.332 LED/4 Na		00018711	
For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.							
Export socket NOVA with plug-in terminals, earth pin and orange socket 2-pole, 16 A 250 V~, with orange central plate for combinations and child protection	orange	10	B 20.6571.332 Si	00033241			
Export socket NOVA with plug-in terminals, with LED control light, earth pin and orange socket 2-pole, 16 A 250 V~, with orange central plate for combinations, child protection and green LED as a voltage indicator, 230 V~/1 mA	orange	10	B 20.6571.332 Si LED/4	00033541			
For replacement lighting elements see page 21.							
Socket SCHUKO® NOVA with plug-in terminals and red socket 2-pole, 16 A 250 V~, with red central plate for combinations	red	10	H 20.6511.362	00019021			
	same, with labeling field 7 x 44 mm	red	10	H 20.6511.362 Na		00019031	
	same, with hinged cover	red	10	H 20.6511.362 K		00019041	
Labeling sheets for laser printer see page 22.							

Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.
 <p>Export socket NOVA with plug-in terminals, earth pin and red socket 2-pole, 16 A 250 V~, with red central plate for combinations and</p>	red	10	B 20.6571.362 Si	00033341
 <p>Export socket NOVA with plug-in terminals, with LED control light, earth pin and red socket 2-pole, 16 A 250 V~, with red central plate for combinations, child protection and green LED as a voltage indicator, 230 V~/1 mA</p> <p>Labeling sheets for laser printer see page 22.</p>	red	10	B 20.6571.362 Si LED/4	00033641
 <p>Socket SCHUKO® NOVA with plug-in terminals and yellow socket 2-pole, 16 A 250 V~, with yellow central plate for combinations</p> <p>same, with labeling field 7 x 44 mm</p> <p>same, with hinged cover</p> <p>Labeling sheets for laser printer see page 22.</p>	yellow yellow yellow	10 10 10	H 20.6511.312 H 20.6511.312 Na H 20.6511.312 K	00018921 00018931 00018941
 <p>Socket SCHUKO® with screw terminals, with red socket, with overvoltage protection and control light with labeling field 7 x 44 mm, nominal leakage current: 2,5 kA up to 10 times, with central plate for combinations, without spreading, with child protection</p> <p>Function: In case of overloading or malfunction of the overvoltage protection, <u>the socket switches off</u>. The control light turns off.</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	AURA NOVA	1 1 1 1 1 1	D 20.6611.02 ÜS/25 D 20.6611.70 ÜS/25 D 20.6611.36 ÜS/25 D 20.6611.022 ÜS/25 D 20.6611.362 ÜS/25 D 20.6611.192 ÜS/25 D 20.6611.702 ÜS/25	00116613 00155613 00128313 00026713 00016013 00041713 00056713
 <p>Export socket with screw terminals, earth pin, overvoltage protection, control light and red socket 2-pole, 16 A 250 V~, for 58 series installation boxes, with labeling field 7 x 44 mm, nominal leakage current: 2,5 kA up to 10 times, with central plate for combinations, with child protection, without spreading</p> <p>Function: In case of overloading or malfunction of the overvoltage protection, <u>the socket switches off</u>. The control light turns off.</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	pure white	1	B 80.6671.02 ÜS/25 Si	00482043
 <p>Socket SCHUKO® DIALOG with screw terminals, with red socket, with overvoltage protection and control light with labeling field 7 x 64 mm, nominal leakage current: 2,5 kA up to 10 times, with central plate for combinations, without spreading</p> <p>Function: In case of overloading or malfunction of the overvoltage protection, <u>the socket switches off</u>. The control light turns off.</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	pure white red	1 1	D 95.6611.02 ÜS/25 D 95.6611.36 ÜS/25	00807813 00807913










Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.		
Combination frames NOVA, for use of DIALOG covers for Ackermann-clino-opt-99 and cover article no. D 95.610.xx KTU for vertical and horizontal installation 1-gang, dimensions 83 x 83 mm 2-gang, dimensions 83 x 154 mm	pure white	10	D 20.671/83.022 T	00048111		
	pure white	10	D 20.672/83.022 T	00048211		
Cover for Ackermann-clino-opt-99 patient call system with red pushbutton, for call module with call pushbutton no. 73073 F3	STANDARD white	10	D 80.910-1 RT-O w	00136311		
	pure white	10	D 80.910-1.02 RT-O	00140311		
	DIALOG pure white	10	D 95.910-1.02 RT-O	00893511		
Cover for Ackermann-clino-opt-99 patient call system with red pushbutton, for call module with call pushbutton and plug-in contact no. 73075 B	STANDARD white	10	D 80.910-1 RT/DSK/NSK w	00136711		
	pure white	10	D 80.910-1.02 RT/DSK/NSK	00140611		
	DIALOG pure white	10	D 95.910-1.02 RT/DSK/NSK	00894011		
Cover for Ackermann-clino-opt-99 patient call system with red pushbutton, for call pushbutton no. 73022 A2	STANDARD white	10	D 80.910-1 RT-U w	00135711		
	pure white	10	D 80.910-1.02 RT-U	00139211		
	DIALOG pure white	10	D 95.910-1.02 RT-U	00893611		
Cover for Ackermann-clino-opt-99 patient call system with blue pushbutton, for call pushbutton for doctor call no. 73022 A2	STANDARD white	10	D 80.910-1 AR w	00136011		
	pure white	10	D 80.910-1.02 AR	00140111		
	DIALOG pure white	10	D 95.910-1.02 AR	00893711		
Cover for Ackermann-clino-opt-99 patient call system with red pushbutton, for call pushbutton with plug-in contacts no. 73022 B and 73023 B	STANDARD white	10	D 80.910-1 RT/NSK w	00136811		
	pure white	10	D 80.910-1.02 RT/NSK	00140711		
	DIALOG pure white	10	D 95.910-1.02 RT/NSK	00893911		
Cover for Ackermann-clino-opt-99 patient call system for call unit as plug-in contact no. 73020 D and 73021 D	STANDARD white	10	D 80.910 NSK/NSK w	00136911		
	pure white	10	D 80.910.02 NSK/NSK	00140811		
	DIALOG pure white	10	D 95.910.02 NSK/NSK	00896311		









Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.	
 <p>Cover for Ackermann-clino-opt-99 patient call system for call unit as diagnostic/plug-in contact no. 73020 E</p>	STANDARD	white pure white	10 10	D 80.910 DSK/NSK w D 80.910.02 DSK/NSK	00137611 00141211
	DIALOG	pure white	10	D 95.910.02 DSK/NSK	00896611
 <p>Cover for Ackermann-clino-opt-99 patient call system for call unit as diagnostic/plug-in contact with 1 plug-in contact no. 73020 F</p>	STANDARD	white pure white	10 10	D 80.910 DSK w D 80.910.02 DSK	00137811 00148311
	DIALOG	pure white	10	D 95.910.02 DSK	00896411
 <p>Cover for Ackermann-clino-opt-99 patient call system for call unit as diagnostic/plug-in contact with 2 plug-in contacts no. 73020 G, 73021 G and 73075 D</p>	STANDARD	white pure white	10 10	D 80.910 DSK/DSK w D 80.910.02 DSK/DSK	00137511 00140911
	DIALOG	pure white	10	D 95.910.02 DSK/DSK	00896511
 <p>Cover for Ackermann-clino-opt-99 patient call system for pull cord pushbutton no. 70046 A and 70045 A3</p>	STANDARD	white pure white	10 10	D 80.910 ZT w D 80.910.02 ZT	00137911 00150011
	DIALOG	pure white	10	D 95.910.02 ZT	00896011
 <p>Cover for Ackermann-clino-opt-99 patient call system for pneumatic call pushbutton no. 70006 C</p>	STANDARD	white pure white	10 10	D 80.910 RTP w D 80.910.02 RTP	00138011 00150111
	DIALOG	pure white	10	D 95.910.02 RTP	00896111
 <p>Cover for Ackermann-clino-opt-99 patient call system for call unit as plug-in contact no. 73020 C</p>	STANDARD	white pure white	10 10	D 80.910 NSK w D 80.910.02 NSK	00137711 00141311
	DIALOG	pure white	10	D 95.910.02 NSK	00896211
 <p>Cover for Ackermann-clino-opt-99 patient call system with green pushbutton, for cancel pushbutton no. 73642 C</p>	STANDARD	white pure white	10 10	D 80.910-1 AT w D 80.910-1.02 AT	00135911 00140011
	DIALOG	pure white	10	D 95.910-1.02 AT	00893811
 <p>Cover for Ackermann-clino-opt-99 patient call system with left yellow, right green pushbutton, for cancel pushbutton no. 73642 E</p>	STANDARD	white pure white	10 10	D 80.910-2 AT/AT w D 80.910-2.02 AT/AT	00135011 00138711
	DIALOG	pure white	10	D 95.910-2.02 AT/AT	00894111







Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.		
Cover for Ackermann-clino-opt-99 patient call system with left red, right green pushbutton, for call/cancel pushbutton no. 73642 B2	STANDARD	white pure white	10 10	D 80.910-2 RT/AT w D 80.910-2.02 RT/AT	00135511 00138911	
	DIALOG	pure white	10	D 95.910-2.02 RT/AT	00894211	
Cover for Ackermann-clino-opt-99 patient call system for radio unit no. 73120 H	STANDARD	white pure white	10 10	D 80.910 LSR w D 80.910.02 LSR	00138211 00150511	
	DIALOG	pure white	10	D 95.910.02 LSR	00896711	
Cover for Ackermann-clino-opt-99 patient call system for program selector no. 73120 A	STANDARD	white pure white	10 10	D 80.910 PWS w D 80.910.02 PWS	00138311 00150611	
	DIALOG	pure white	10	D 95.910.02 PWS	00896811	
Cover for Ackermann-clino-opt-99 patient call system for bus terminate passive no. 72639 A and bus switch no. 72642 C	STANDARD	white pure white	10 10	D 80.910 BAW w D 80.910.02 BAW	00134911 00138611	
	DIALOG	pure white	10	D 95.910.02 BAW	00899511	
Cover for Ackermann-clino-opt-99 patient call system with red pushbutton, for call module with call pushbutton and plug-in contacts no. 73073 E3 and 73075 A	STANDARD	white pure white	10 10	D 80.910-1 RT-O/NSK w D 80.910-1.02 RT-O/NSK	00136611 00140511	
	DIALOG	pure white	10	D 95.910-1.02 RT-O/NSK	00899711	
Cover for Ackermann-clino-opt-99 patient call system with yellow pushbutton, for cancel pushbutton no. 73642 D	STANDARD	white pure white	10 10	D 80.910-1 ATY w D 80.910-1.02 ATY	00135811 00139911	
	DIALOG	pure white	10	D 95.910-1.02 ATY	00899911	
Cover for Ackermann-clino-opt-99 patient call system for bus connection no. 73070 A	STANDARD	white pure white	10 10	D 80.910 BAE w D 80.910.02 BAE	00138411 00150911	
	DIALOG	pure white	10	D 95.910.02 BAE	00883511	
Cover for Ackermann-clino-opt-99 patient call system with left white, right green pushbutton, for service room unit no. 73642 B2	STANDARD	white pure white	10 10	D 80.910-2 DZE w D 80.910-2.02 DZE	00135611 00139111	
	DIALOG	pure white	10	D 95.910-2.02 DZE	00883711	
Cover for Ackermann-clino-opt-99 patient call system for drop socket no. 74186 A	STANDARD	white pure white	10 10	D 80.910 ABW STD w D 80.910.02 ABW STD	00134811 00138511	
	DIALOG	pure white	10	D 95.910.02 ABW STD	00899611	

Hospital/EDP installation devices

Article Designation	Colour	Packed	Article no.	Code no.
 <p>Call unit for a disabled WC consisting of 4 flush-mounted devices, complete with combination central plates and 1-gang frame in AURA design, for fitting in flush-mounted boxes with 68 mm Ø: • Call module with light signal, potential-free signal contact and integrated buzzer, • pull cord pushbutton for surface-mounting and ceiling-mounting • cancel pushbutton for cancelling the triggered call in the WC • Network device 24 V~/250 mA</p>	pure white	1	D 20.470.02 WC SET	00953493
 <p>Service room unit for connection to the complete call device article no. D 20.470.02 WC SET, flush-mounted device complete with combination central plate and 1-gang frame in AURA design, for fitting in flush-mounted sockets with 58 mm Ø, with green presence button and yellow buzzer off button</p>	pure white	1	D 20.470-2.02 DZE	00953593
 <p>Special covers for nurse call installations Ackermann clino opt 90/99, Televic, Hospicall and Zettler are available. Furthermore, the Nira/Ericsson product range is compatible with PEHA.</p>				
 <p>Potential conductor-connector socket STANDARD with labeling field 7 x 44 mm according to DIN 42 801, with 2 contact pins, for 58 series installation boxes, with screw fastening, for connection up to 4 x 2.5 mm² and 1 x 6 mm², with central plate for combinations Labeling sheets for laser printer see page 22.</p>	white arctic pure white	10 10 10	H 80.1942 PA Na w H 80.1942 PA Na Aw H 80.1942.02 PA Na	00428831 00428731 00427931
 <p>Potential conductor-connector socket STANDARD according to DIN 42 801, with 2 contact pins, for 58 series installation boxes, with screw fastening, for connection up to 4 x 2.5 mm² and 1 x 6 mm², with central plate for combinations, with hinged cover and symbol print</p>	white pure white	10 10	H 80.1942 PA K w H 80.1942.02 PA K	00429821 00428121
 <p>Potential conductor-connector socket DIALOG according to DIN 42 801, with 2 contact pins</p>	white pure white	10 10	H 95.1942.03 PA H 95.1942.02 PA	00846021 00845921
 <p>Potential conductor-connector socket according to DIN 42 801, with 2 contact pins</p>	AURA pure white NOVA pure white	10 10	H 20.1942.02 PA H 20.1942.022 PA	00156421 00030921
 <p>Potential conductor angled plug according to DIN 42 801, up to 6 mm²</p>		10	D 1945	00965591

Hospital/EDP installation devices/Built-in sockets

Article Designation	Colour	Packed	Article no.	Code no.		
Sockets with grounding and compact design especially for installation in e. g. medical pillars. Equipped with phosphorus bronze grounding brackets, providing a contact force that conforms to DIN 42 801. The installation sockets excel in the VDE and KEMA tests.						
Combination frames COMPACTA for vertical and horizontal installation 1-gang, dimensions 60 x 60 mm						
	pure white	10	D 771.02	00603111		
	orange	10	D 771.33	00677411		
	red	10	D 771.36	00677711		
	green	10	D 771.42	00677111		
	yellow	10	D 771.31	00676811		
2-gang, dimensions 60 x 113 mm						
	pure white	10	D 772.02	00603211		
	orange	10	D 772.33	00677511		
	red	10	D 772.36	00677811		
	green	10	D 772.42	00677211		
	yellow	10	D 772.31	00676911		
3-gang, dimensions 60 x 166 mm						
Combination frames COMPACTA, with labeling field 7 x 44 mm, 1-gang, dimensions 60 x 63 mm						
	pure white	10	D 771.02 Na	00600911		
	orange	10	D 771.33 Na	00677311		
	red	10	D 771.36 Na	00677911		
	green	10	D 771.42 Na	00677011		
Labeling sheets for laser printer see page 22.						
Socket SCHUKO® with plug-in terminals 16 A 250 V~, with connection terminals according to VDE 0620, with front installation, with cover						
	pure white	10	D 6511.02 ME	00264411		
same, with child protection	pure white	10	D 6511.02 ME Si	00264711		
same, with LED control light, green	pure white	10	D 6511.02 ME LED/4	00271611		
same, with child protection and LED control light, green	pure white	10	D 6511.02 ME LED/4 Si	00272311		
Socket SCHUKO® with screw terminals 16 A 250 V~, with connection terminals according to VDE 0620, with front installation, with cover						
same, with child protection	pure white	10	D 6611.02 ME	00255011		
same, with control light	pure white	10	D 6611.02 ME Si	00255111		
same, with child protection and control light	pure white	10	D 6611.02 ME GLK	00255211		
same, 45° angled	pure white	10	D 6611.02 ME GLK Si	00255311		
same, with child protection and LED control light, green	pure white	10	D 6611.02 ME Wi	00254211		
For replacement lighting elements see page 21.	pure white	10	D 6611.02 ME LED/4 Si	00256151		
Socket SCHUKO® with plug-in terminals, with red cover and red socket 16 A 250 V~, with connection terminals according to VDE 0620, with front installation, with cover						
same, with child protection	red	10	D 6511.36 ME	00260411		
	red	10	D 6511.36 ME Si	00265911		
Socket SCHUKO® with LED control light, with red cover and red socket 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with cover for front installation						
same, with child protection	red	10	D 6511.36 ME LED/4	00271911		
For replacement lighting elements see page 21.	red	10	D 6511.36 ME LED/4 Si	00272011		







Hospital/EDP installation devices/Built-in sockets









	Article Designation	Colour	Packed	Article no.	Code no.
	Socket SCHUKO® with screw terminals, with red cover and red socket 16 A 250 V~, with connection terminals according to VDE 0620, with front installation, with cover	red	10	D 6611.36 ME	00259011
	same, with child protection	red	10	D 6611.36 ME Si	00259111
	same, with control light	red	10	D 6611.36 ME GLK	00259211
	same, with child protection and control light	red	10	D 6611.36 ME GLK Si	00259311
	same, 45° angled	red	10	D 6611.36 ME Wi	00248911
	For replacement lighting elements see page 21.				
	Socket SCHUKO® with LED control light, with green cover and green socket 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with cover for front installation	green	10	D 6511.42 ME LED/4	00269711
	same, with child protection	green	10	D 6511.42 ME LED/4 Si	00269811
	For replacement lighting elements see page 21.				
	Socket SCHUKO® with plug-in terminals, with green cover and green socket 16 A 250 V~, with connection terminals according to VDE 0620, with front installation, with cover	green	10	D 6511.42 ME	00264611
	same, with child protection	green	10	D 6511.42 ME Si	00264911
	Socket SCHUKO® with screw terminals, with green cover and green socket 16 A 250 V~, with connection terminals according to VDE 0620, with front installation, with cover	green	10	D 6611.42 ME	00256011
	same, with child protection	green	10	D 6611.42 ME Si	00256111
	same, with control light	green	10	D 6611.42 ME GLK	00256211
	same, with child protection and control light	green	10	D 6611.42 ME GLK Si	00256311
	same, 45° angled	green	10	D 6611.42 ME Wi	00254411
	For replacement lighting elements see page 21.				
	Socket SCHUKO® with LED control light, with orange cover and orange socket 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with cover for front installation	orange	10	D 6511.33 ME LED/4	00270811
	same, with child protection	orange	10	D 6511.33 ME LED/4 Si	00270911
	For replacement lighting elements see page 21.				
	Socket SCHUKO® with plug-in terminals, with orange cover and orange socket 16 A 250 V~, with connection terminals according to VDE 0620, with front installation, with cover	orange	10	D 6511.33 ME	00264511
	same, with child protection	orange	10	D 6511.33 ME Si	00264811
	Socket SCHUKO® with screw terminals, with orange cover and orange socket 16 A 250 V~, with connection terminals according to VDE 0620, with front installation, with cover	orange	10	D 6611.33 ME	00257011
	same, with child protection	orange	10	D 6611.33 ME Si	00257111
	same, with control light	orange	10	D 6611.33 ME GLK	00257211
	same, with child protection and control light	orange	10	D 6611.33 ME GLK Si	00257311
	same, mit 45° angled	orange	10	D 6611.33 ME Wi	00254311
	For replacement lighting elements see page 21.				

Hospital/EDP installation devices/Built-in sockets







Article Designation	Colour	Packed	Article no.	Code no.	
Socket SCHUKO® with LED control light, with yellow cover and yellow socket 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, with cover for front installation and child protection For replacement lighting elements see page 21.	yellow	10	D 6511.31 ME LED/4 Si	00271111	
Socket SCHUKO® with screw terminals, with yellow cover and yellow socket 16 A 250 V~, with connection terminals according to VDE 0620, with front installation, with cover same, with child protection same, with control light same, with child protection and control light same, 45° angled For replacement lighting elements see page 21.	yellow	10	D 6611.31 ME	00259711	
	yellow	10	D 6611.31 ME Si	00259811	
	yellow	10	D 6611.31 ME GLK	00257821	
	yellow	10	D 6611.31 ME GLK Si	00259521	
	yellow	10	D 6611.31 ME Wi	00259911	
Export socket with earth pin, with screw terminals 2-pole, 16 A 250 V~, with front installation, with cover, with child protection	pure white	10	B 6671.02 ME Si	00280141	
	orange	10	B 6671.33 ME Si	00280341	
	red	10	B 6671.36 ME Si	00273541	
	green	10	B 6671.42 ME Si	00280441	
Export socket with earth pin, with plug-in terminals 2-pole, 16 A 250 V~, with front installation, with cover, with child protection	pure white	10	B 6571.02 ME Si	00258041	
	orange	10	B 6571.33 ME Si	00252541	
	red	10	B 6571.36 ME Si	00252841	
	green	10	B 6571.42 ME Si	00258541	
Export socket with earth pin, with screw terminals 2-pole, 16 A 250 V~, with front installation, with cover, with child protection and control light For replacement lighting elements see page 21.	pure white	10	B 6671.02 ME GLK Si	00255741	
	orange	10	B 6671.33 ME GLK Si	00257541	
	red	10	B 6671.36 ME GLK Si	00274241	
	green	10	B 6671.42 ME GLK Si	00256541	
Export socket with earth pin, with plug-in terminals, with LED control light 2-pole, 16 A 250 V~, with front installation, with cover, with child protection	pure white	10	B 6571.02 ME LED/4 Si	00255841	
	orange	10	B 6571.33 ME LED/4 Si	00255941	
	red	10	B 6571.36 ME LED/4 Si	00253641	
	green	10	B 6571.42 ME LED/4 Si	00256741	
Labeling clip for ME built-in sockets, labeling field 7 x 31.5 mm, only for installation at rear into the 43.8 x 54 mm cutout Labeling sheets for laser printer see page 22.	pure white	50	D 70.02 Na	00629411	
	orange	50	D 70.33 Na	00629511	
	red	50	D 70.36 Na	00629611	
	green	50	D 70.42 Na	00627311	

Hospital/EDP installation devices/Built-in sockets

Article Designation	Colour	Packed	Article no.	Code no.
 <p>Socket SCHUKO® COMPACTA with screw terminals, with green cover 16 A 250 V~, with connection terminals according to VDE 0620, with installation depth of 32 mm, with cover, with hinged cover</p>	green	10	D 6711.42 K	00632311
 <p>Socket SCHUKO® COMPACTA with screw terminals, mit orange cover 16 A 250 V~, with connection terminals according to VDE 0620, with installation depth of 32 mm, with cover, with hinged cover</p>	orange	10	D 6711.33 K	00632411
 <p>Equipment holder for all COMPACTA devices, for mounting on DIN-rail The device holder may be installed only by complying with the standards for medical care equipment according to EN 60601-1, DIN VDE 0100-520.</p>	black	10	D 701 TR	00611311
 <p>Socket SCHUKO® with plug-in terminals, for underfloor installations 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with full cover plate for single installation, 1-gang</p>	white pure white green orange red	10 10 10 10 10	D 6511.03 UF Wi D 6511.02 UF Wi D 6511.42 UF Wi D 6511.33 UF Wi D 6511.36 UF Wi	00496911 00496811 00497311 00497011 00488811
 <p>Socket SCHUKO® with plug-in terminals, for underfloor installations 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with full cover plate for single installation, 2-gang</p>	white pure white green orange red	10 10 10 10 10	D 6512.03 UF Wi D 6512.02 UF Wi D 6512.42 UF Wi D 6512.33 UF Wi D 6512.36 UF Wi	00496511 00496411 00496711 00496611 00495211
 <p>Socket SCHUKO® with screw terminals, for underfloor installations 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, with full cover plate for single installation, 3-gang</p>	white pure white green orange red	10 10 10 10 10	D 6313.03 UF Wi D 6313.02 UF Wi D 6313.42 UF Wi D 6313.33 UF Wi D 6313.36 UF Wi	00489611 00489511 00489811 00489711 00493711

Article Designation	Colour	Packed	Article no.	Code no.	
Socket SCHUKO® with LED control light, with label "SV" and green socket, IP 54 for "emergency power supply", 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, 1-gang, with green hinged cover, with labeling field 10 x 48.5 mm For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.	grey/green	10	D 6620 WAB LED/4 Na grün SV	00808411	
Socket SCHUKO® with label "SV" and green socket, IP 54 for "emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, 1-gang, with green hinged cover same, with labeling field 10 x 48.5 mm same, with control light and labeling field 10 x 48.5 mm For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.	grey/green grey/green grey/green	10 10 10	D 6620 WAB grün SV D 6620 WAB Na grün SV D 6620 WAB GLK Na grün SV	00803011 00803111 00803311	
Socket SCHUKO® with label "SV" and green socket, IP 54 for "emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, 2-gang, with green hinged cover same, with labeling field 10 x 48.5 mm Pre-wired. Equipped on all sides with replaceable PVC cable feed-throughs. Labeling sheets for laser printer see page 22.	grey/green grey/green	5 5	D 6632 WAB grün SV D 6632 WAB Na grün SV	00803611 00803711	
Socket SCHUKO® with LED control light, with label "ZSV" and orange socket, IP 54 for "additional emergency power supply", 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, 1-gang, with orange hinged cover, with labeling field 10 x 48.5 mm For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.	grey/orange	10	D 6620 WAB LED/4 Na or ZSV	00809411	
Socket SCHUKO® with label "ZSV" and orange socket, IP 54 for "additional emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, 1-gang, with orange hinged cover same, with labeling field 10 x 48.5 mm same, with control light and labeling field 10 x 48.5 mm For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.	grey/orange grey/orange grey/orange	10 10 10	D 6620 WAB or ZSV D 6620 WAB Na or ZSV D 6620 WAB GLK Na or ZSV	00808011 00808111 00808311	
Socket SCHUKO® with label "ZSV" and orange socket, IP 54 for "additional emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, 2-gang, with orange hinged cover same, with labeling field 10 x 48.5 mm Pre-wired. Equipped on all sides with replaceable PVC cable feed-throughs. Labeling sheets for laser printer see page 22.	grey/orange grey/orange	5 5	D 6632 WAB or ZSV D 6632 WAB Na or ZSV	00808611 00808711	
Socket SCHUKO® with label "EDV", IP 54 2-pole, 16 A 250 V~, DIN 49 440, with connection terminals according to VDE 0620, 1-gang, with red hinged cover, labeling field 10 x 48.5 mm same, with control light For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.	grey/red grey/red	10 10	D 6620 WAB Na rot EDV D 6620 WAB GLK Na rot EDV	00813111 00813311	
Socket SCHUKO® with label "EDV", IP 54 2-pole, 16 A 250 V~, DIN 49 440, with connection terminals according to VDE 0620, 2-gang, horizontal, with control light, red hinged cover, labeling field 10 x 48.5 mm and label "EDV". Pre-wired. Equipped on all sides with replaceable cable feed-throughs. For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.	grey/red	5	D 6632 WAB GLK Na rot EDV	00814311	

Hospital/EDP installation devices/△ IP 44

Article Designation	Colour	Packed	Article no.	Code no.	
 <p>Combination frames with sealing flange for vertical and horizontal installation 1-gang, dimensions 85 x 85 mm</p> <p>2-gang, dimensions 85 x 156 mm</p> <p>3-gang, dimensions 85 x 227 mm</p>	white pure white	10 10	D 80.671 WU w D 80.671.02 WU	00362111 00203611	
	white pure white	5 5	D 80.672 WU w D 80.672.02 WU	00362211 00203711	
	white pure white	5 5	D 80.673 WU w D 80.673.02 WU	00362311 00203811	
 <p>Socket SCHUKO®, unbreakable, with LED control light, with label "SV" and green socket, IP 44 for "emergency power supply", 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, for combinations installation, with green hinged cover, with labeling field 10 x 48.5 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	green	10	D 80.6511.42 K WU LED/4 Na SV	00800711	
 <p>Socket SCHUKO®, unbreakable, with screw terminals, with label "SV" and green socket, IP 44 for "emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, for combinations installation, 1-gang, with green hinged cover same, with labeling field 10 x 48.5 mm same, with control light and labeling field 10 x 48.5 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	green green green	10 10 10	D 80.6611 K WU grün SV D 80.6611 K WU Na grün SV D 80.6611 K WU GLK Na grün SV	00802011 00802111 00802311	
<p>Export-Sockets with earth pin (Belgium), IP 44, with green socket see page 178!</p>					
 <p>Socket SCHUKO®, unbreakable, with LED control light, with label "ZSV" and orange socket, IP 44 for "additional emergency power supply", 2-pole, 16 A 250 V~, with plug-in terminals, with green LED as a voltage indicator, 230 V~/1 mA, LED lifetime appr. 10 years, for combinations installation, with orange hinged cover, with labeling field 10 x 48.5 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	orange	10	D 80.6511.33 K WU LED/4 Na ZSV	00800811	
 <p>Socket SCHUKO®, unbreakable, with screw terminals, with label "ZSV" and orange socket, IP 44 for "additional emergency power supply", 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, for combinations installation, 1-gang, with orange hinged cover same, with labeling field 10 x 48.5 mm same, with control light and labeling field 10 x 48.5 mm</p> <p>For replacement lighting elements see page 21. Labeling sheets for laser printer see page 22.</p>	orange orange orange	10 10 10	D 80.6611 K WU or ZSV D 80.6611 K WU Na or ZSV D 80.6611 K WU GLK Na or ZSV	00807011 00807111 00807311	
<p>Export-Sockets with earth pin (Belgium), IP 44, with orange socket see page 180!</p>					
 <p>Potential conductor-connector socket according to DIN 42 801, with 2 contact pins, for 58 series installation boxes, with screw fastening, for connection up to 4 x 2.5 mm² and 1 x 6 mm², with central plate for combinations, with hinged cover and symbol print</p>	white	10	H 80.1942 PA K WU w	00367021	