
THE ENERGY-EFFICIENT **LED STREET LIGHT**

Model: ST-2M/6000

With its compact design and latest LED architecture from Philips, RADIUS street lights is a versatile, cost-effective luminaire that fulfils all functional road lighting requirements. It is made of highquality components that ensure long lifetime and low maintenance cost. RADIUS street lights comes with 3 kA surge protected Xitanium Programmable LED Extreme drivers and latest Fortimo FastFlex LED boards from Philips with efficiency up to 155 lm/W. Big choice of different optics available allows to choose optimal solution for every application.

radius

LED ST





















GENERAL TECHNICAL SPECIFICATIONS					
Supply Voltage	220-240V AC				
Supply Frequency	50-60 Hz				
RFI Suppression	EN 55015 / CISPR 15				
Immunity	EN 61547				
Harmonics	EN 6100-3-2				
Operating Temperature**	-30 - +35 °C				
Storage Temperature	-40 - +60 °C				
Housing material	Aluminum				
Enclosure Rating	IP66				
Lid material	Polycarbonate				
Mech. impact protection	IK09				
Protection class IEC	Safety class I				


EN 6100-3-2
-30 - +35 °C
-40 - +60 °C
Aluminum
IP66
Polycarbonate
IK09
Safety class I
······································

YEARS
 2
Fortimo FastFlex Gen 3
 3000, 4000 or 5700

Number of LED modules	2
Lamp family code	Fortimo FastFlex Gen 3
Light color K	3000, 4000 or 5700
Color Rendering Index	> 70 or > 80
Min useful life L70 B50	100.000 h
Driver /power unit/	PHILIPS XITANIUM
Power factor (full load at 230V)	> 0.95
Control method	1- 10V, Dynadimmer LITE (DALI optional)
Dimming range	7100 %
System Wattage	up to 80 W
LED module efficiency	up to 155 lm/W
LED Luminous Flux per Fitting (nominal)	up to 16.200 lm


GENERAL TECHNICAL SPECIFICATIONS

				Dimensions (mm)*			
Ref.	Wattage	Efficiency	Lumen output	D	L	w	н
ST-3M/6000	40W	155 lm/W	6.200 lm	580	676	303	186
ST-3M/6000	60W	145 lm/W	8.700 lm	580	676	303	186
ST-3M/6000	80W	135 lm/W	10.800 lm	580	676	303	186

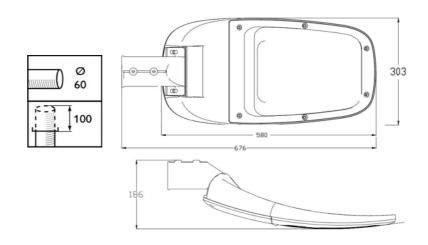



AVAILABLE OPTICS

FastFlex lens 2x8/II-X Gen2 Designed for narrow roads and urban street lighting




FastFlex lens 2x8/IV-X Gen2 Designed for wide roads and as






FastFlex lens 2x8/III-X Gen2



FastFlex lens 2x8/V Gen2 Designed for symmetrical lighting, e.g. parking lots, petrol stations



FastFlex lens 2x4/SW-X Gen2

Designed for Pedestrian Road and Bicycle lighting.

