



ATRIA LED

Product Group: Continuous Line and Batten Luminaires



Type: A batten LED luminaire with asymmetric light beam and is designed to provide an even lighting over the entire board

Specification: Light source: LED, included
 Optics: asymmetric light beam
 Light distribution type: direct
 Body and endcaps: steel sheet, white colour
 Ingress protection code: IP40
 Mechanical impact resistance: IK05
 Mains voltage: 220-240V 0/50-60Hz
 Power factor: >0,95
 Protection class IEC: I
 Operating temperature range, °C: 0...+40 °C
 Luminaire is plastic-wrapped and packed in single box

Installation: Surface luminaire is designed to be fixed to ceiling of any type or suspended. Terminal, 3x2x2.5mm2


Application: Indoor. Ideal for blackboard/whiteboard lighting in teaching areas

Name	Overall dimensions (LxWxH)**, mm	Lifetime	Luminaire output*, lm Ta=25°C	System power*, W	System efficacy, lm/W	CRI (Ra)	CCT, K	Weight, kg
Atria LED1x3000 D570 T840 LS1A18	1170x73x80	50000	2973	20,0	148	80+	4000	2,50
Atria LED1x3700 D571 T840 LS1A18	1170x73x80	50000	3668	24,0	150	80+	4000	2,50
Atria LED1x3750 D572 T840 LS1A18	1457x73x80	50000	3716	24,0	154	80+	4000	3,20
Atria LED1x4600 D573 T840 LS1A18	1457x73x80	50000	4585	31,0	150	80+	4000	3,20

* Tolerance range for optical and electrical data: ±10 %

Options available on request:

- SDIM- Switch-control/dimming
- DALI- DALI driver
- EM3- Emergency version 3 hours
- EM3B- Emergency version 3 hours (best available technology)
- LS1A18- Optic with asymmetric beam
- 5TB- 5 way terminal block with two holes (for in and out going cable)
- T830- Colour temperature 3000K, CRI 80+
- T840- Colour temperature 4000K, CRI 80+
- 1LIN- Through wiring 3x1.5 mm² with two push-in terminal blocks
- 3LIN- Through wiring 5x1.5 mm² with two push-in terminal blocks
- RAL- RAL colour
- SUS- Suspended version

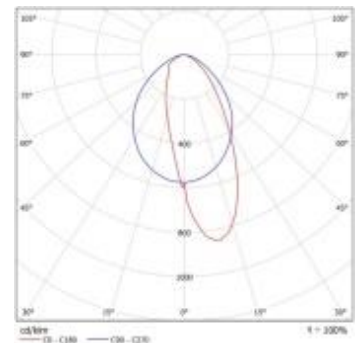

Accessories:



Product: BR
 Short description: Mounting bracket for Atria (1 pcs)