

Facade system

Using facade surfaces optimally



Clear added value for your facade

- photovoltaic installation is hung vertically in front of the facade
- Fixing set with building authority approved dowels and stainless steel screws
- visible mounting system components are available in blank aluminum or black anodised
- mounting modules in portrait or in landscape

Product requirements

- For solid exterior walls
- For cold facades without insulation

Your benefits


- High-quality installation aesthetics thanks to insertion technology
- Flexible system size: From a single module to the entire facade surface
- The facade is used to generate electricity
- A construction with excellent rear ventilation which hangs in front of the building but does not touch it
- pre-assembled parts



Few components - simple and fast installation



Very good rear ventilation of the modules

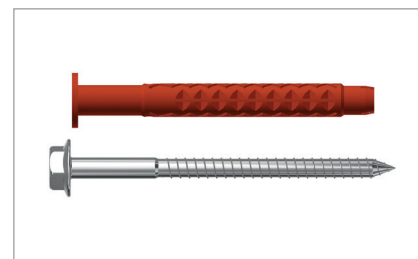


Dowels with technical approval




Pic Designation

- 1 **Insertion rail**
 - Insertion rails in blank/black anodized for frame heights
 - Tension-free mounting
- 2 **Edge stop**
 - color-coordinated with the insertion rail
 - prevents modules from slipping out
- 3 **Socket insertion rail**
 - connection to the masonry in blank and black
 - for fixing insertion rail
- 4 **Cross-rail connector**
 - safe connection due to force and form closure
 - completely pre-assembled
- 5 **Slip guard**
 - protecting the modules against slipping
 - for fixing perforated sheet

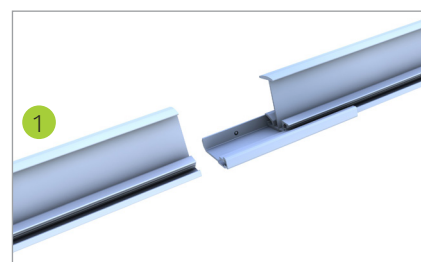

Connecting insertion rails

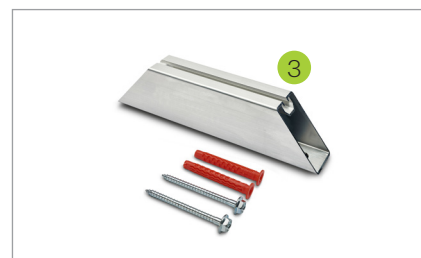

Socket set, optional in blank and black

Video



novotegra GmbH
Eisenbahnstraße 150 | 72072 Tübingen | Deutschland
Tel. +49 7071 98987-0, info@novotegra.com
www.novotegra.com

Subject to changes and errors exdepted.
Last updated: July 2021 / TP