
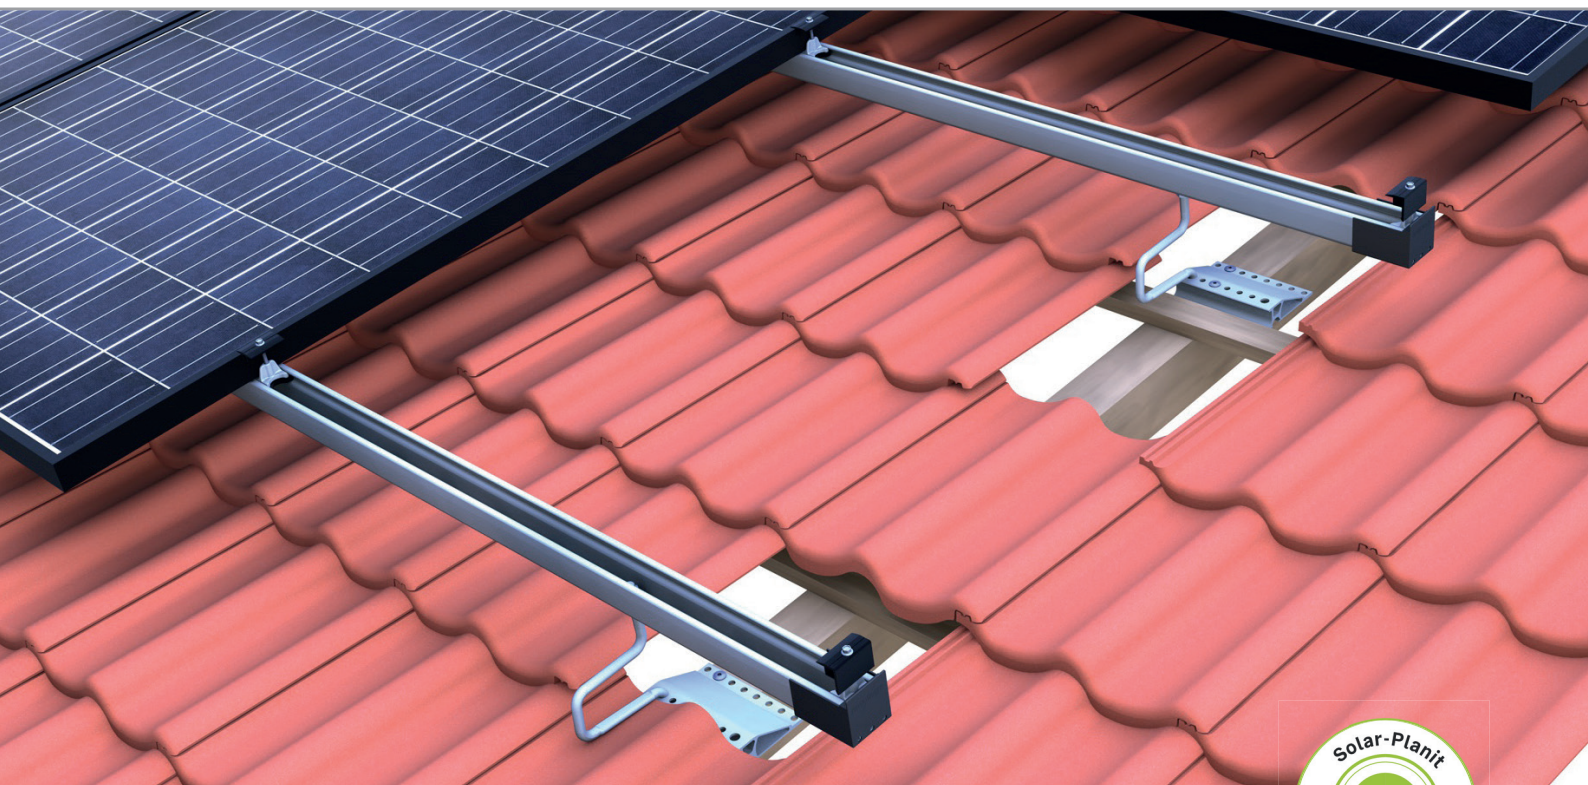


Tile roof | clamping system top-fix

Clamping system with modules installed in portrait



Powerful, stable and flexible


- components usable across different roof types
- module landscape installation possible with cross layer system
- only two clamps for all frame heights in blank and black anodized

product variants


- flex roof hook for low loads
- roof hook versions for 40mm battens available
- double roof hooks for heavy loads
- rails and clamps available in blank and black anodized

Your benefits


- three-way adjustable roof hook to level out uneven roofs, for different tile strenghts and shapes
- quick mounting from above with easily graspable components
- narrow tile gap and centric load distribution
- the C-rail also acts as a cable channel

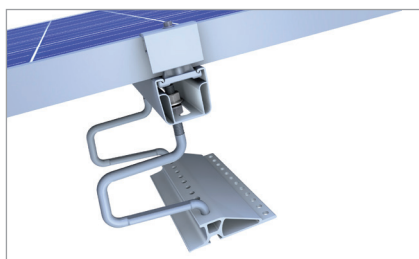


Double roof hooks for heavy snow loads

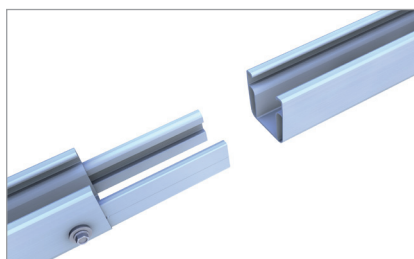

C47 S rail connectors for profile clammers

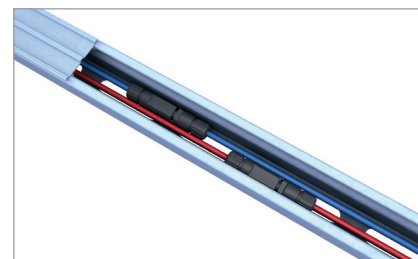

C-rail as cable channel

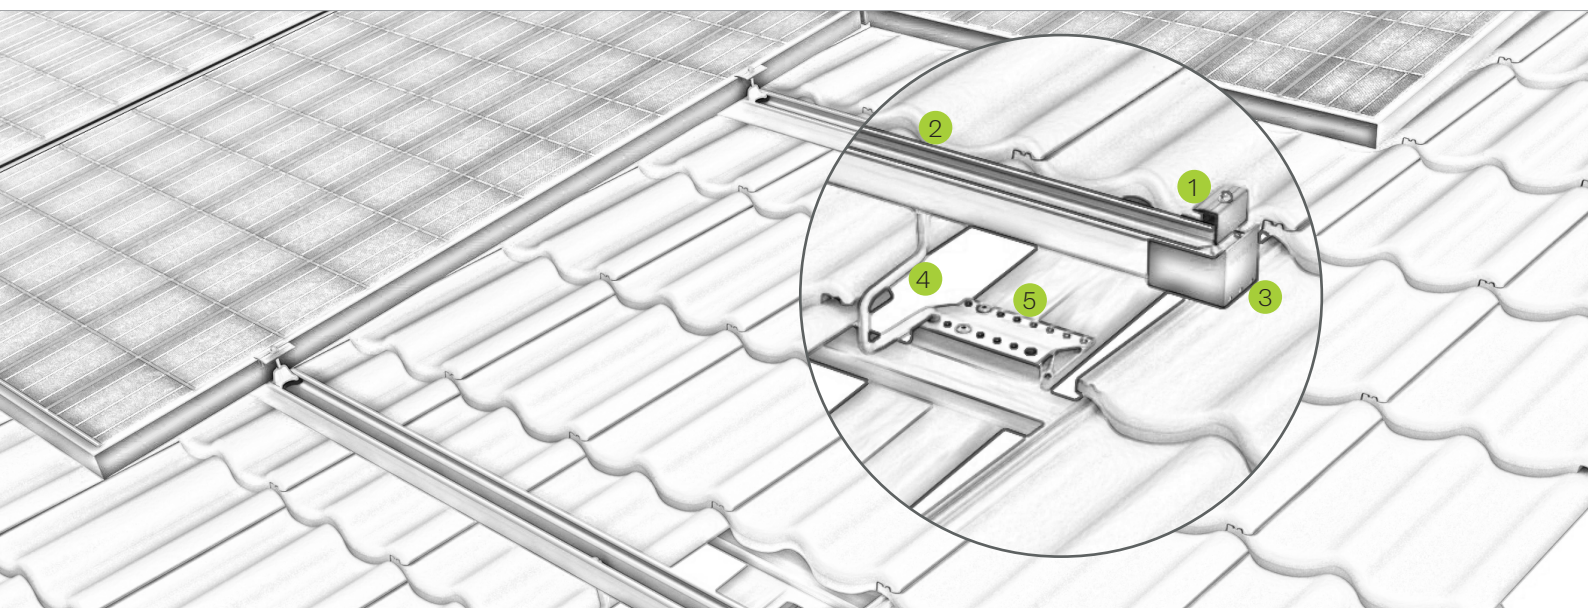


Pic Designation

- 1 **Middle and end clamp**
 - for frame heights of 30-42 mm and 43-52 mm
 - installation-friendly thanks to click-in mechanism
- 2 **C-rail**
 - available in different strength and lengths
 - can be stepped on throughout installation
- 3 **End cap**
 - for optically tidy rail ends
 - UV and weather resistant
- 4 **Roof hook**
 - three-way adjustable for perfect installations
 - various roof hooks for low and high load situations
- 5 **Screws**
 - building authority-approved
 - Ø 6 / 8 mm available in different lengths



Light roof hooks for narrow rafters

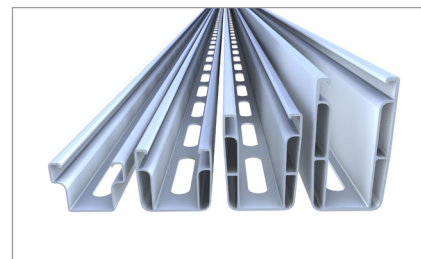

Variations of C-rail

Mounting video



novotegra GmbH
Eisenbahnstraße 150 | 72072 Tübingen | Deutschland
Tel. +49 7071 98987-0, info@novotegra.com
www.novotegra.com

Subject to changes and errors excepted.
Last updated: April 2021 / TP